

C770

UL Standard Door Closer



Product Features:

- Selectable position power size 2~4
- Adjustable closing & latching speed
- Thermo-constant valve
- Surface mount
- Rack & Pinion action
- Standard arm mechanism
- Adjustable back check (optional upon request)

C77Z	2	3	4
Max. Door width (mm)	870	950	1100
Max. Opening Angle	160	160	145

Application Ranges:

- Standard door mount on pull side
- Transom mount on push side
- Parallel bracket application on size 2
- Single-action door
- Non-handed installation


Accessories:

- Hold open arm
- Parallel bracket
- Drop plate

Finishes:

- Painted – silver, brown, gold, black, white & other RAL colors upon request & discussion

Dimensions:

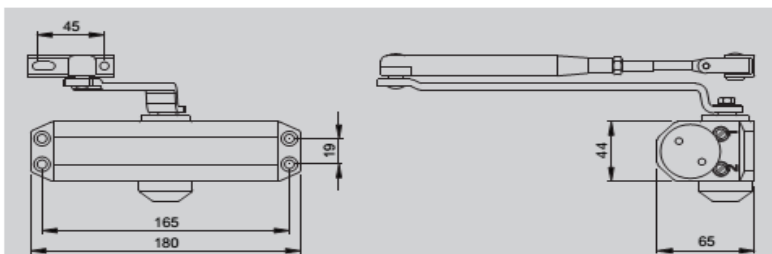

Rack & Pinion

