



SPECIFICATIONS


Exposed Trim: levers are made of zinc die casting, and roses are stainless steel or brass based to match
 Keying: 5-pins tumbler SC1 keyway with two brass keys. And 6-pins cylinder available. Various keyways
 Door Range: 1-3/8" to 1-3/4" (35mm to 45mm) standard.
 Backset: universal 2-3/8" (60mm) back, and 2-3/4" (70mm) backset available.

STANDARD FEATURES

- Wrought steel housing with chromated finish for better corrosion resistance.
- Meets 400,000 cycles ANSI A156.2 Grade 2 requirements.



1. Torsion springs inside for smooth operation.
2. Spool pins available for picking resistance.
3. Bottom loaded cylinder house available for easy rekeying.
4. solid stainless steel latch bolt with better security

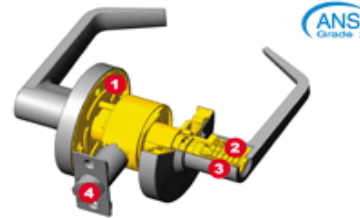

Products



M01-C801-00-SN

Finish						
CODE	AB	AC	PB	SB	ORB	TB
BHMA	609		605	606	613	
US	5	11	3	4	10B	11P
CODE	SS	PS	CP	SC	AN	SN
BHMA	630	632	625	626	620	619
US	32D	32	26	26D	15A	15

MARCO POLO ARCHITCTURAL HARDWARE