



M01-561WF Electromagnetic lock (water proof) 350lbs

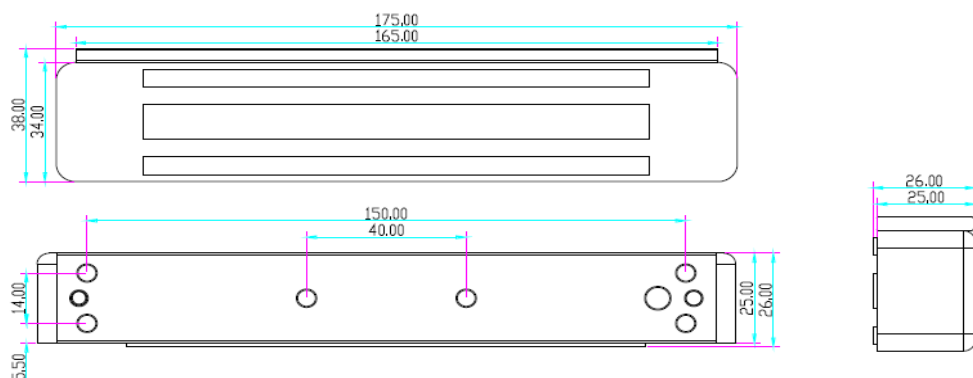

- ⚠ Notice:** Please read the following instructions before installation.
- Please handle the lock carefully. Any damage of the surface or the armature plate will reduce the magnetic force.
 - Fix the lock on the door frame and the armature plate on the door leaf. The accessories can provide better conjunction to the lock and the armature plate.
 - Please keep the door closed when you drill holes.
 - Fasten the screws of the lock.
 - The limit value of the reed switch of the door signal detection is 0.5A/30V DC. Don't overload.
 - Make sure the armature plate can be slightly shaken when locked, for the rubber washer need some spaces to adjust the position of the armature plate and the lock.
 - Please select the correct wiring for DC 12V or DC 24V voltage input.

Dimension	175Lx38Wx26H(mm)
Holding force	180kg(350Lbs)
Current	DC12V or DC24V
Voltage	12V/400mA±10% 24V/200mA±10%
Signal output	Lock signal NO/COM
Suitable for	Wooden door ; Glass door; Metal door; Fireproof door
Operating temp	-10~+55°C
IP rate	IP-68
Weight	1.2kg

M01-561WF 電磁鎖 (防水) 350磅

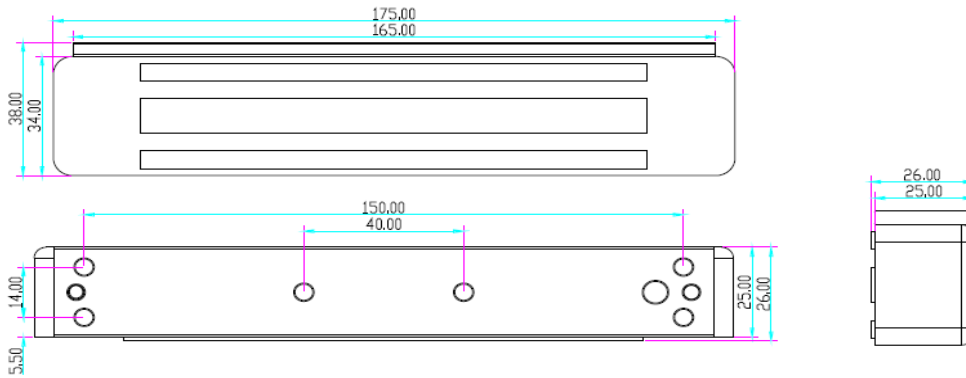

安裝磁力鎖前請細心閱讀下列說明：

- * 磁力鎖緊固在門框上，吸板安裝在門上。安裝包內的配件讓吸板能圍繞它的中心軸翹動，以補償由於位置或安裝失當的誤差。
- * 開孔務必在門緊閉的狀態下進行。
- * 狀態偵測號，切勿過載幹簧管、幹觸點的極限。
- * 磁力鎖鑰絲需收緊，吸板鑰絲不能太緊；要讓橡皮墊圈有足夠的彈性使吸力自行調整到正確的位置。
- * 接線時檢查電壓，選用優質變壓器；大多數磁力鎖的損壞由於劣質變壓器所至。

鎖體尺寸	長175x寬38x厚26(mm)
最大拉力	180kg(350Lbs)直綫拉力
輸入電壓	DC12V或DC24V
工作電流	12V/400mA±10% 24V/200mA±10%
信號輸出	鎖狀態信號NO、COM接點
適用門型	木門、玻璃門、金屬門、防火門
工作溫度	-10~+55℃
防水等級	IP-68
產品重量	1.2kg